

T Series


TRIAC Dimming LED Driver

可控硅调光LED驱动器

Features:

- Compact design
- Dimmable constant current driver
- Analogue flicker-free
- Dimming with leading edge or trailing edge dimmer
- Smooth dimming compatible with most dimmer
- Dimming range 1...100%
- Configurable constant current output via dip-switch
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, over temperature
- SELV equivalent
- Driver for built-in use
- Suitable for class II luminaires
- Protection class II

- 紧凑型设计
- 可调光恒流驱动
- 无频闪
- 适用可控硅前切相或后切相调光器
- 平滑高性能调光，匹配更多的调光器
- 调光范围1...100%光通量
- 通过拨码开关选择输出电流
- 输入输出螺丝锁紧接线端子
- 输出开路、短路，过载和过温保护
- 符合安全特低电压标准
- 内置式驱动运用
- 适用于II类灯具
- 保护等级 II

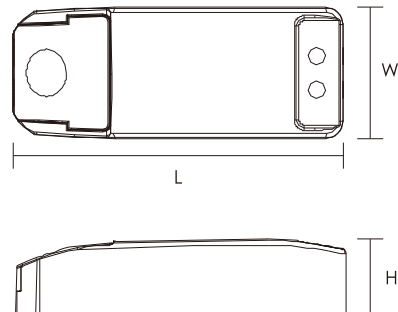

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
DIM185mA/9W	220-240	9	185	25-50	0.90C	80	-20...+50	80	SELV	98x39x22	70
DIM300mA/9W	220-240	9	300	12-30	0.90C	79	-20...+50	80	SELV	98x39x22	70
DIM350mA/9W	220-240	9	350	6-26	0.90C	79	-20...+50	90	SELV	98x39x22	70
DIM260mA/12W	220-240	12	260	24-46	0.90C	80	-20...+50	80	SELV	98x39x22	70
DIM300mA/12W	220-240	12	300	21-40	0.90C	80	-20...+50	80	SELV	98x39x22	70
DIM350mA/12W	220-240	12	350	18-35	0.90C	80	-20...+50	80	SELV	98x39x22	70
DIM500mA/12W	220-240	12	500	12-24	0.90C	79	-20...+50	80	SELV	98x39x22	70
DIM700mA/12W	220-240	12	700	9-18	0.90C	79	-20...+50	80	SELV	98x39x22	70
DIM1050mA/12W	220-240	12	1050	6-12	0.90C	78	-20...+40	80	SELV	98x39x22	70

