

LCS Series

TRIAC Dimming LED Driver


可控硅调光LED驱动器

Features:

- Dimmable with leading edge or trailing edge dimmer
- Super slim design
- Driver for built-in use
- Push wire connections
- Wide output voltage extended down to 50%
- High power factor >0.95
- High efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV class I output
- Smooth dimming compatible with most dimmer
- Dimming range from 1...100%



- 适用普通可控硅前切相或后切相调光器
- 超细长紧凑设计
- 内置式驱动
- 按压式接线端子
- 50%宽输出电压范围
- 高功率因数>0.95
- 高效率, 温升低
- 输出开路, 短路, 过载和超温保护
- SELV和I等级
- 平滑高性能调光, 匹配更多的调光器
- 调光范围 1...100%光通量

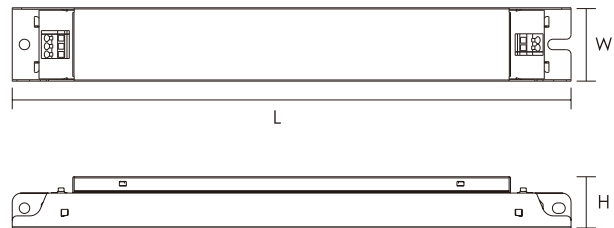

Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
LCS50030NT	220-240	30	500	30-60	0.95	<15	86	<0.5	-20...+50	80	SELV	210x31.5x22	190